

CGTW4-4


cabletronic

Cabletronic Srl
Via Emilia, 13 – 29010 Cadeo (PC)
Tel. 0523.501158
Fax. 0523.503225
Mail: info@cabletronicsrl.com



CGTW4-4	Model <i>Modello</i>	CGTW4-4
12 e 24 V_{DC}	Nominal tension <i>Tensione nominale</i>	<i>12 e 24 V_{DC}</i>
9-36 V_{DC}	Voltage supply <i>Tensione di alimentazione</i>	<i>9-36 V_{DC}</i>
210mA min; 10A max	Power consuption <i>Consumo</i>	<i>210mA senza carico; 10A a carico</i>
Freescale MC9S12XDP512: RAM 32Kb, Flash EEprom 512Kb, Eeprom 4Kb	Microcontroller <i>Microcontrollore</i>	<i>Freescale MC9S12XDP512: RAM 32Kb, Flash EEprom 512Kb, Eeprom 4Kb</i>
-45° / +85°	Operating temperature <i>Temperatura di esercizio</i>	<i>-45° / +85°</i>
N° 4 input positive/negative or analog/digital or input capture	Input <i>Ingressi</i>	<i>N° 4 ingressi digitali positivo/negativo o analogico/digitali o input capture</i>
N° 4 output self-protected N° 1 5V_{DC} digital output 500mA	Output <i>Uscite</i>	<i>N° 4 uscite digitali autoprotette</i> <i>N° 1 uscite digitali 5 VDC a 500mA</i>
N° 5 CAN-BUS SAEJ1939 line	Comunication <i>Comunicazione</i>	<i>N° 5 Linee CAN-BUS SAEJ1939</i>
N° 1 Wi-fi ST SPWF01SA.21 2.4GHz Prot. 802.11b/g/n module (optional)	Device <i>Dispositivi</i>	<i>N° 1 modulo Wi-fi ST SPWF01SA.21 2.4GHz Prot. 802.11b/g/n (optional)</i>
IP67	IP protection degree <i>Protezione IP</i>	<i>IP67</i>
Material: PE66	Box <i>Contenitore</i>	<i>Materiale: PE66</i>
N° 1 Ampseal 35 poli	Connectors <i>Connettori</i>	<i>N° 1 Ampseal 35 poli</i>

Dimensioni centralina e fissaggio (mm)

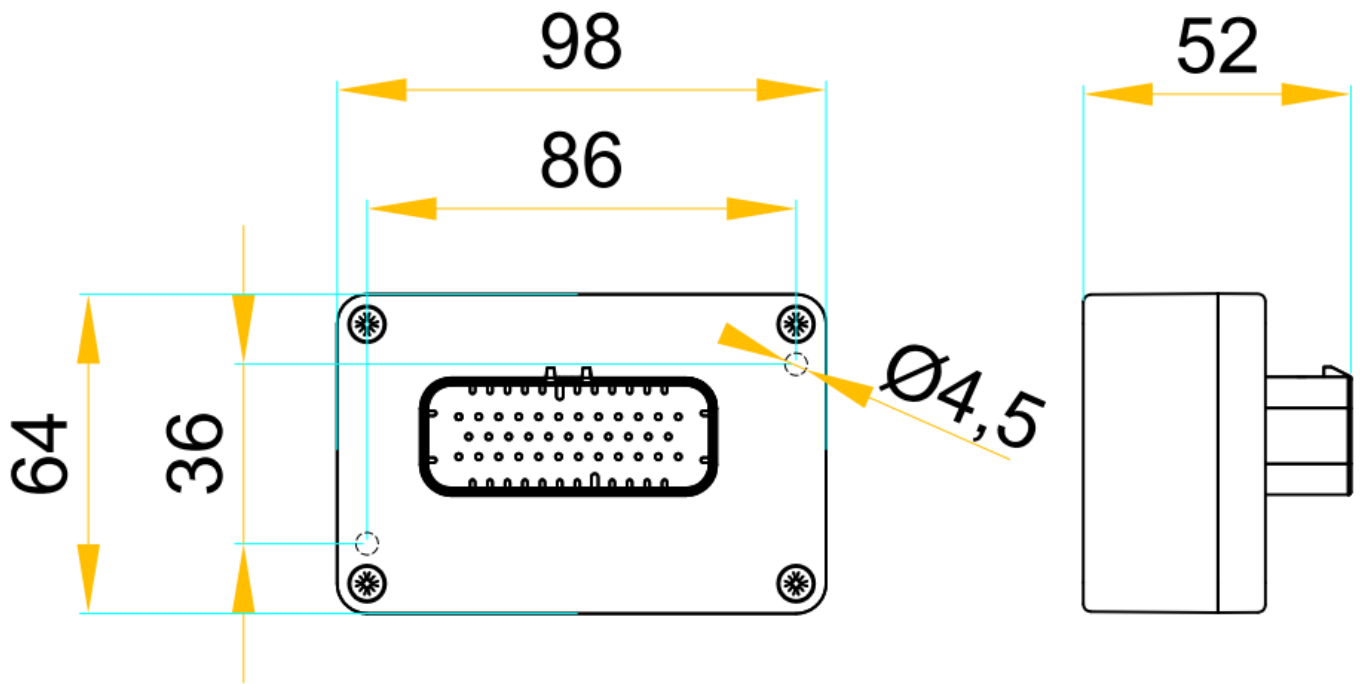

[Download CGTW4-4.iqs](#)